


Installation steps: Room corner



1. Prepare the corner patch

Pre-fold TESCO TANGO and partially remove the release film of the attachment surface.

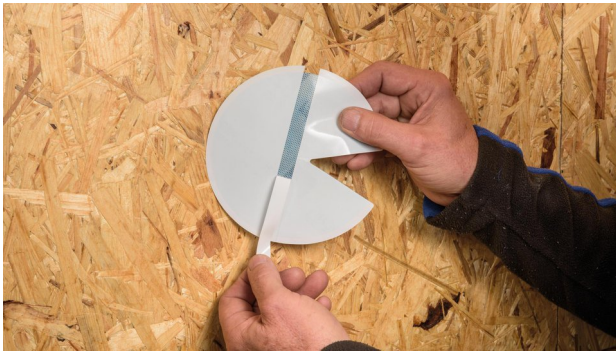

2. Initial attachment

Attach the patch into the corner using the attachment surface. Use PRESSFIX for situations with difficult access.



3. Stick the first independent adhesive strip

Position TESCO TANGO in its final position, gradually remove the release films and stick the patch in place. Ensure that adhesion is carried out tightly in the corner and that there are no cavities.



4. Rub the patch firmly into place

This step can be carried out in a manner that is kinder to your hands by using the pro clima PRESSFIX application tool.

Installation steps: skylights



1. Determine the depth of the independent adhesive strip

Measure the width of the available attachment surface using a measuring rule.



2. Cut to size

Place the measuring rule on the installation edge and cut TESCO TANGO to size.



3. Pre-folding

Remove the narrow release film and pre-fold the patch as shown here.



4. Sticking

Guide the patch into the groove of the skylight.
Stick into the groove and onto the vapour check.
Rub tape firmly into place using the pro clima PRESSFIX.
Ensure that there is sufficient resistance pressure.

Substrates

Clean substrates before sticking.

Adhesion to frozen surfaces is not possible. There must be no water-repellent substances (e.g. grease or silicone) on materials to be bonded. Subsurfaces must be sufficiently dry and stable.

Permanent adhesion is achieved on all pro clima interior and exterior membranes, on other vapour-check and airtight membranes (e.g. those made of PE, PA, PP and aluminium) and on other underlay and wall lining membranes (e.g. those made of PP and PET).

Bonding and joints are possible with planed and painted wood, hard plastics and metal (e.g. pipes, windows etc.) and hard wood-based panels (chipboard, OSB, plywood, MDF and wood fibre underlay panels). Pretreatment with TESCON PRIMER is required in the case of adhesion to wood-fibre underlay panels or on smooth, mineral substrates. Concrete or plaster substrates must not be sandy or crumbling.

The best results in terms of structural stability are achieved on high-quality substrates. It is your responsibility to check the suitability of the subsurface; adhesion tests are recommended in certain cases.

Pretreatment with TESCON PRIMER is recommended in the case of substrates with insufficient stability.

General conditions

The bonds should not be subjected to tensile forces.

Press firmly to secure the adhesive tapes in place. Ensure that there is sufficient resistance pressure.

Windproof, airtight or rainproof bonding can only be achieved on vapour checks, roof underlays or wall lining membranes that have been laid without folds or creases.

Ventilate continuously and systematically to prevent build-up of excessive humidity; use a dryer if necessary.

The information provided here is based on practical experience and the current state of knowledge. We reserve the right to make changes to the recommended designs and processing or to make alterations due to technical developments and associated improvements in the quality of our products. We would be happy to inform you of the current technical state of the art at the time you use our products.

Further information about the application and construction can be found in the pro clima planning documentation. For queries please call the pro clima technical hotline on +49 (0)6202 278245.

MOLL

bauökologische Produkte GmbH

Rheinalstraße 35 - 43

D-68723 Schwetzingen

Fon: +49 (0) 62 02 - 27 82.0

eMail: info@proclima.de